


Piezoresistive Low Cost OEM Transmitter Series 20 M / S

Series 20 M: Brass Housing.

Series 20 S: Steel Housing.

These KELLER OEM-pressure transmitters with round print and COB-Progres are particularly adapted to the requirements in the industrial pressure metrology. Their very good price/performance ratio builds the basis for applications where ready-made output signals are required or where the integration into an existing system or own housing is asked.

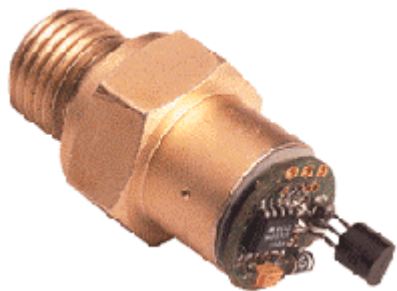

Series 20 M



Series 20 S

Pressure Ranges	0,5...400 bar (abs./rel.)	
Output	0,5...4,5 V 4...20 mA	
Linearity	typ. $\pm 0,2$ % FS of adjusted range	max. $\pm 0,5$ % FS of adjusted range
Stability	typ. $\pm 0,1$ % FS of basic range (BR)	max. $\pm 0,2$ % FS of basic range (BR)
Operating Temperature	-10...80°C (stand.)	-40...100°C (max.)
T.C. of Zero	< 0,01 %BR / °C	< 0,015 %BR / °C
T.C. of Sensitivity	< 0,01 % / °C	< 0,015 % / °C