

Datasheet 2525

- ✓ Low-cost
- ✓ Easy operation
- ✓ Maximum pressure 400 bar
- ✓ High reliability
- ✓ High stability
- ✓ Easy installation



The dirt separator 2525 is an indispensable tool to be used in combination with pneumatic dead weight tester and pneumatic pressure control units. Chances of contamination of these high value instruments coming from the units under test are significant.

The dirt separator 2525 catches moist and/or solid particles which often contain chemical elements. Thus, the piston/cylinder assemblies of dead weight testers and the moving parts in pneumatic pressure controllers are safeguarded against corrosion and scratches. The 2525 is suitable for pressures up to 400 bar.

About Tradinco Instruments

Tradinco Instruments provides the best solution for every test, measurement and calibration challenge in the industry.

Our brand promises:

- ✓ Skilled specialists
- ✓ Customer focus
- ✓ Broad portfolio
- ✓ Long-term partnership

Technical specifications

Max. pressure	400 bar
Dimensions	40 x 195 x 60 mm
Material of construction	Chromium plated brass
Connections	Gauge adaptors 1/8", 1/4", 3/8", 1/2" 1/2" BSP MALE Needle valve T1700 1/8" NPT female


Options

1/2" BSP connection to Minimes 1215 for installation on the 8185/919x

Testcase

Ordering code

2101.07.12.62

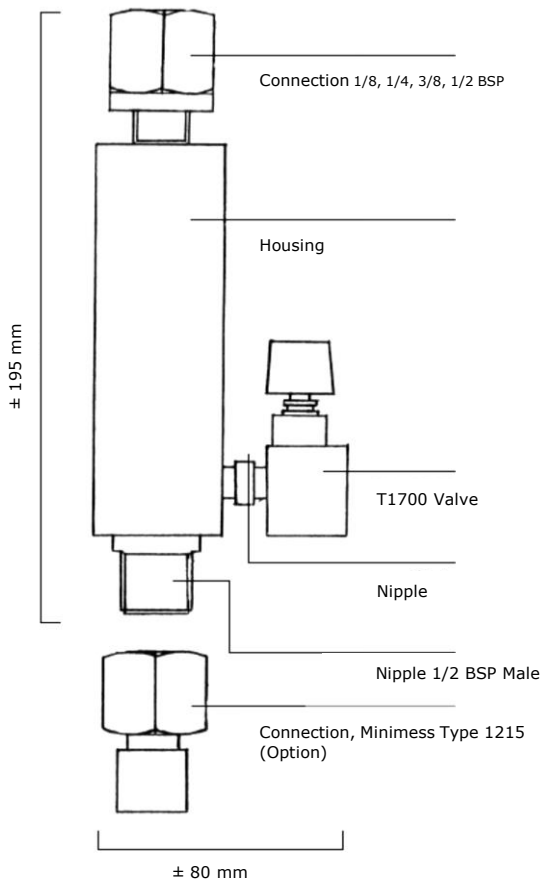

Specifications of the product may be changed without notice